




Rcstars All-In-one PC adopts Intel core processors, and streams an entire screen system into an elegant, powerful device with the ability to create, stream and share HD Content, you can work and play with more confidence, All in one is well suited for both touch and non touch applications. Featuring a unique quick disconnect PC design, multiple I/O Ports, makes the most of your digital world. All in one touch screen computers could be used in a wide range markets, such as gaming machines, hospitality systems, industrial automation, interactive kiosks, point of sale system and retail displays.

Key Features:

- CPU: Intel® Core® Processor, I3 5010U (Dual core four thread, 3M L3 Cache, 2.1GHz)
- Chipset: Haswell-U
- Graphic Card: Intel HD5500
- Memory: 4GB RAM, 64GB SSD
- Audio: Realtek ALC662
- Ethernet LAN: 1*RTL8111F LAN
- 2500nits high brightness
- Air condition for cooling and heating system
- Sunlight readable and dustproof function
- IP65 waterproof function
- Light sensor option

Application:

- Security
- Transportation
- Atm Automation
- Medical Equipment
- Gaming Machine
- Networking Pos
- General Application

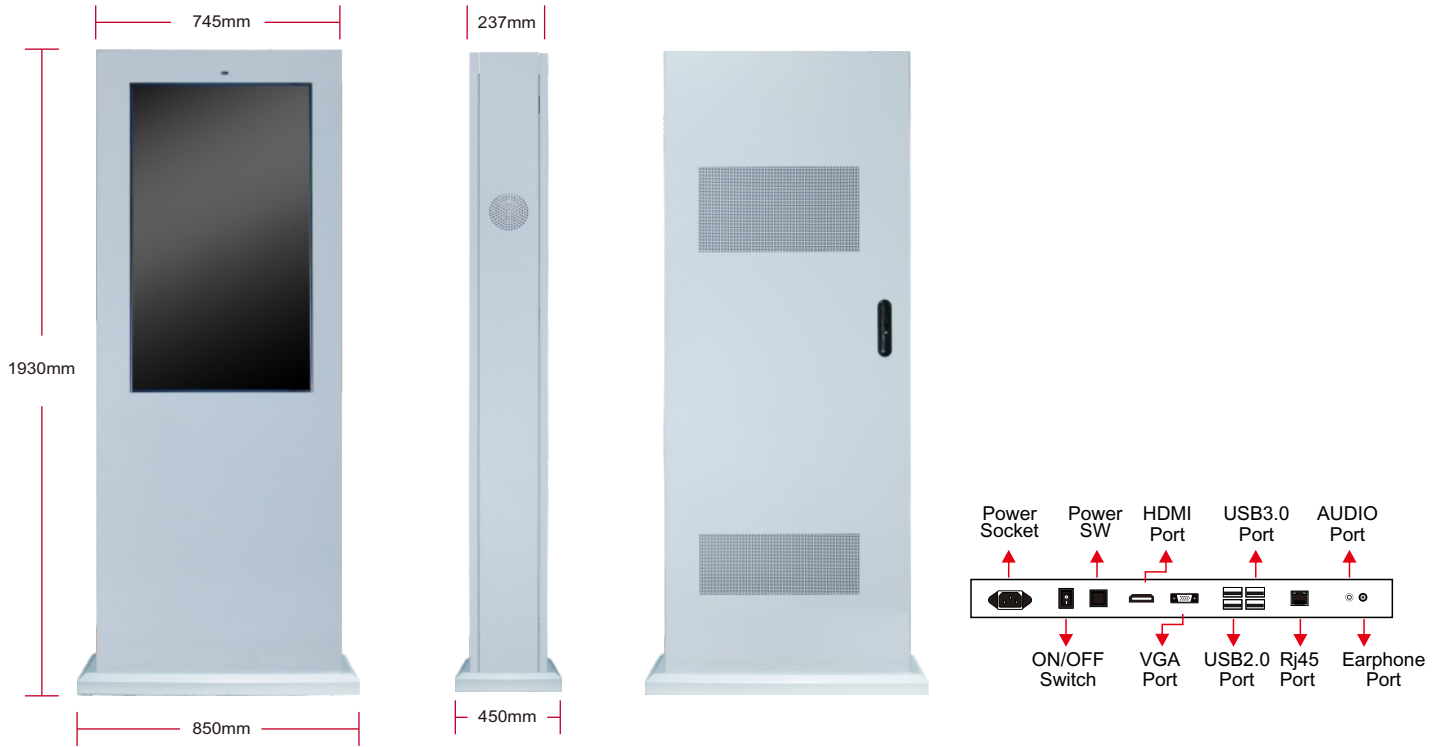

Specifications

| | | | | | | |
|-----------------------|----------------------|---|--------------------------|----------------------------|-----------------------|--|
| PANEL | Panel Model | 43inch TFT LED | RESOLUTION REFRESH RATE | Output Mode | 1920 x 1200 60Hz | |
| | Max Resolution | 1920x1080 | | 1920 x 1080 60Hz | | |
| | Aspect Ratio | 16:09 | | 1600 x 1200 60Hz | | |
| | Pixel Pitch | 0.4903x0.4903 | | 1440 x 900 60Hz | | |
| | Viewing Angle | 89/89/89/89 | | 1366 x 768 60Hz | | |
| | Contrast Ratio | 1200:1 | | 1360 x 768 60Hz | | |
| | Brightness | 500cd/m ² | | 1280 x 1024 60Hz | | |
| | Response Time | 26ms | | 1280 x 800 60Hz | | |
| | Display Area (mm) | 941.184x529.416mm | | 1280 x 768 60Hz | | |
| | Panel Size(mm) | 973x565.8x29mm | | 1024 x 768 60Hz | | |
| | Screen Weight | 11Kg | | 800 x 600 56, 60, 72, 75Hz | | |
| Lamp Type | WLED | 640 x 480 60, 67, 72, 75Hz | | | | |
| CELERON SPECIFICATION | CPU | Intel® Core® Processor, I3 5010U (Dual core four thread, 3M L3 Cache, 2.1GHz) | POWER | Mains Power | AC 100-240V, 50-60 Hz | |
| | Chipset | Haswell-U | | Consumption | 440W | |
| | Bios | Intel HD5500 | | SOUND | Built-in Speakers | 2 x 10W |
| | Memory | 4GB RAM, 64GB SSD | | | DIMENSION & WEIGHT | Machine Size |
| | Audio | Realtek ALC662 | | Machine Weight | | 850X50X450mm(stand base) |
| Ethernet LAN | 1*RTL8111F LAN | Carton Size | 105KG / 17KG(stand base) | | | |
| CONNECTOR | Rear Panel I/O | X1 HDMI port | OTHER | Regulatory Approvals | CE, FCC, ROHS | |
| | | X1 VGA port | | Warranty | 1 year warranty | |
| | | X1 RJ-45 port | | ACCESSORIES | Included | AC Power Cord, CD, Tools and Screws, User manual, Keys |
| | | X2 USB 2.0 ports and 2 * USB 3.0 ports | | | | |
| | | X2 Audio I/O ports (Mic and Line-out) | | | | |
| CONNECTIVITY | LAN | RJ45 Port, 10/100M Ethernet | | | | |
| | WiFi | Built-in WiFi 802.11B/G/N | | | | |
| MULTIMEDIA | USB Playback Audio | AAC, AIF, AIFF, ASF, LPCM, M3U, M4A, MP3, MP4, WAV, WMA | | | | |
| | USB Playback Picture | BMP, GIF, JPEG, JPG | | | | |
| | USB Playback Video | M2TS, M4V, MK3D, MKV, MP4, MPEG, MPG, MTS, TS, TTS, VOB, WMV | | | | |
| | | | | | | |