





RCSTARS Professional LCD Monitors will catch the attention of your customers. High resolution, high performance could meet all kinds of needs of commercial users. Rcstars monitors have a wide range screen sizes from 10" to 84" with 24/7 applications, Eco-Friendly LED Backlit commercial displays consume 30% less power than CCFL-Backlit models, prolong the lifetime of LCD Screen itself. All monitors are with VGA/HDMI inputs, could connect with any type media player box, PC and video devices.

Key Features:

- 49 inch LCD Monitor
- 1920x1080 resolution
- 89/89/89/89 viewing angle
- VGA/HDMI inputs
- 7-24 hours operation
- Standard 400x400MM Vesa Holes
- 2 High Quality Speakers
- Infrared touch/Capacitive Touch options

Application Areas

- Hospitals
- Retail Stores
- Shopping Malls
- Supermarkets
- Museums and Galleries
- Airports
- Train/Bus Stations

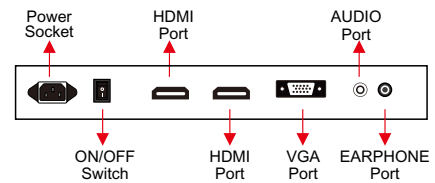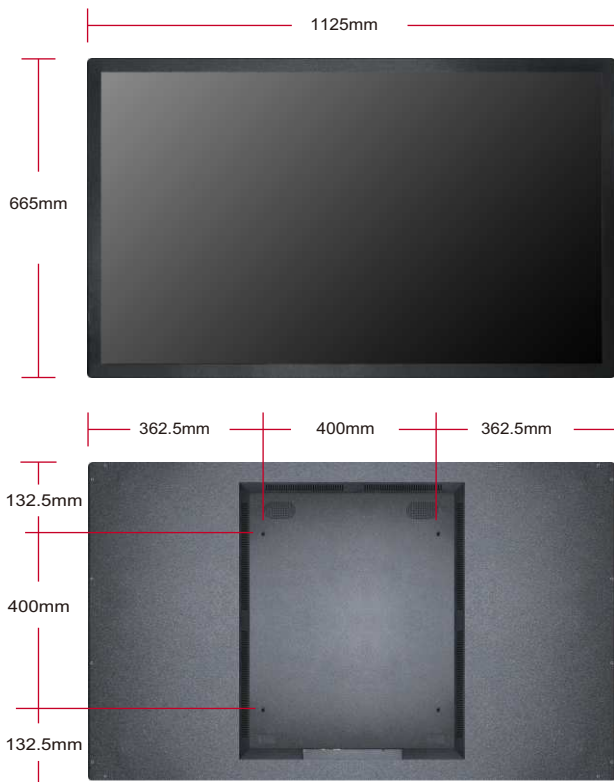

Specifications

DISPLAY	Panel Model	49inch TFT LCD
	Max Resolution	1920x1080
	Aspect Ratio	16:09
	Pixel Pitch	0.53025x0.53025
	Viewing Angle	89/89/89/89
	Contrast Ratio	1000:1
	Brightness	500cd/m ²
	Response Time	12ms
	Display Area (mm)	1073.78x604mm
	Panel Size(mm)	1096.2x632.5x29mm
	Screen Weight	18Kg
Lamp Type	WLED	
INTERFACE	2*HDMI input	
	1*PC-RGB(VGA) input	
	1*PC-Audio input	
	1*Earphine output	
	1*AC input	
	PC-VGA	Up to 1920x1080@60Hz
HDMI	480i,480p,720i,720p,1080i,1080p	
Switch	Power on/off	
DESIGN	Color	Matte Black
	Wall Mount	VESA (400X400MM)

ON-SCREEN DISPLAY LANGUAGES	English, French, German, Italian, Polish, Russian, Simplified Chinese, Spanish, Turkish, Arabic, Japanese, Traditional Chinese etc.	
DISPLAY MODE	Portrait & Landscape	
POWER	Mains Power Consumption AC 100-240V, 50-60 Hz 98 W	
SOUND	Built-in Speakers 2 x 10W	
DIMENSION & WEIGHT	Machine Size	1125x70x665mm
	Machine Weight	24.7KG
	Wooden Case Size	1245x910x345mm (2PCS)
	Wooden Case Weight	81.5KG
OTHER	Regulatory Approvals CE, FCC, ROHS, HDMI certificates	
	Warranty	1 year warranty
ACCESSORIES	Remote Control	Optional
	Power Supply	x1 AC cable
	User's Manual	x1